

Standard Features - Reach-in Refrigerator #HF-23

- · Self-closing door with convenient stay-open feature
- · 430 Stainless steel exterior
- · Painted aluminum interior
- · Equipped with casters
- "No stoop" lower shelf; Easily accessible condenser coil for cleaning, and easy service access
- Temperature range of (-5)°F 2°F
- · 3 shelves included: versatile shelf slide design also accepts full size food pans
- · Environmentally-safe R290 refrigerant
- · Digital temperature controller with automatic defrost function
- 115V; 2/3HP ETL Safety & Sanitation Listed
- ETL listed. Conforms to UL STD. 471, Certified to CSA STD. C22. 2No.120
- Conforms to NSF/ANSI STD. 7.

Construction

Exterior Material 430 Stainless Steel Interior Material Painted aluminum Insulation Material Foamed-In-Place Polyurethane Shelf Size (3) 23.2W x 23.6"D Shelf Material Epoxy-Coated Steel Shelf Load Capacity 88 lbs.


Dimensions

Net Volume Net Weight Gross Weight

Exterior Dimensions 29"W x 32-1/4"D x 82-1/2"H Interior Dimensions 24.4"W x 271"D x 51.6"H Shipping Dimensions 30-1/4"W x 34"D x 84-1/2"H 23.1 cu. ft. 321 lbs. 345 lbs.





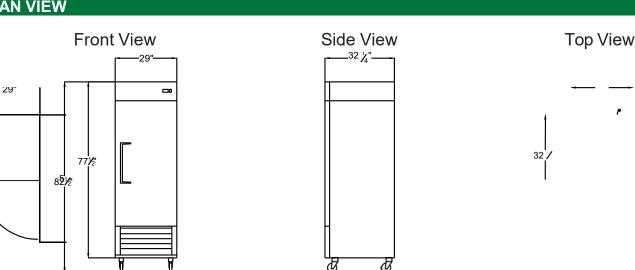

Temperature Range -8°F - 0°F R290 Refrigerant Max. Ambient Temperature 90°F Automatic Defrosting Temperature Controller Digital Horsepower 2/3

Electrical

Coolina

Voltage 115 Amps 4.2 Hz 60 Phase 1 Plug Type NEMA-5-15P Electrical Cord Length 96"

PLAN VIEW

1 " 4