



Model #AUC-48F

Cooling

Temperature Range	(-8°F - 0°F)
Refrigerant	R290
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	3/7

Electrical

Voltage	115
Amps	3.6
Hz	60
Phase	1
Plug Type	NEMA-5-15P
Electrical Cord Length	96"

Standard Features – Undercounter Freezer Model #AUC-48F

- Environmentally-safe R290 refrigerant
- 430 series stainless steel interior and exterior
- Foamed-in-place polyurethane insulation
- One epoxy-coated shelf accommodates up to 88 lb.
- Option of Back splashes available. Condensing unit access in back of cabinet, slides out for easy maintenance
- Environmentally-safe R290 refrigerant
- Temperature range of -8°F - 0°F
- Digital temperature controls
- (2) door with recessed handles
- 115V; 3/7 HP
- ETL listed. Conforms to UL STD. 471, Certified to CSA STD. C22. 2No.120
- Conforms to NSF/ANSI STD. 7

Construction

Exterior Material	430 Stainless Steel
Interior Material	430 Stainless Steel
Insulation Material	Foamed-In-Place Polyurethane
Shelf	(2) 20.8 x 17.1 epoxy-coated steel holds up to 88 lb.
Casters	(4) 4" casters for mobility


Dimensions

Exterior Dimensions	47.2"W x 29-1/2"D x 35.2"H
Interior Dimensions	42.6"W x 19.8"D x 23.5"H
Shipping Dimensions	50"W x 32-1/4"D x 38-1/2"H
Working Height	35-1/4"
Net Volume	11.9 cu. ft.
Net Weight	256 lb.
Gross Weight	290 lb.




PLAN VIEW

Front View

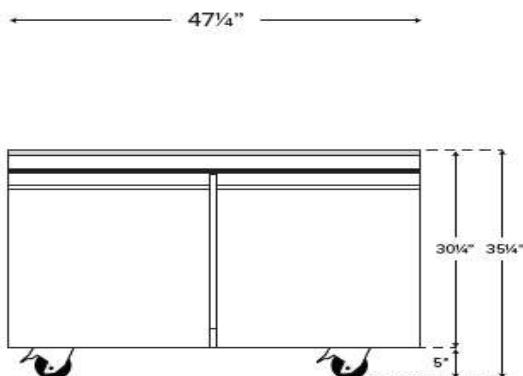

Side View

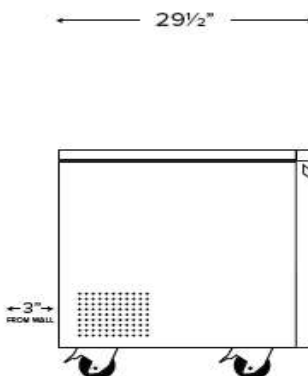

Top View

