



Model #AUC-60F

Cooling

Temperature Range	-8°F - 0°F
Refrigerant	R290
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	2/3

Electrical

Voltage	115
Amps	4.5
Hz	60
Phase	1
Plug Type	NEMA-5-15P
Electrical Cord Length	96"

Standard Features – Undercounter Freezer Model #AUC-60F

- Environmentally-safe R290 refrigerant
- 430 series stainless steel interior and exterior
- Foamed-in-place polyurethane insulation
- (2) epoxy-coated shelf accommodates up to 88 lb.
- Option of Back splashes available. Condensing unit access in back of cabinet, slides out for easy maintenance
- Environmentally-safe R290 refrigerant
- Temperature range of -8°F - 0°F
- Digital temperature controls
- (2) door with recessed handles
- 115V; 2/3 HP
- ETL listed. Conforms to UL STD. 471, Certified to CSA STD. C22. 2No.120
- Conforms to NSF/ANSI STD. 7

Construction

Exterior Material	430 Stainless Steel
Interior Material	430 Stainless Steel
Insulation Material	Foamed-In-Place Polyurethane
Shelf	(2) 27.4" x 17.1" epoxy-coated steel holds up to 88 lb.
Casters	(4) 4" casters for mobility

Dimensions

Exterior Dimensions	60.2"W x 29.5"D x 35.5"H
Interior Dimensions	55.6"W x 19.8"D x 23.5"H
Shipping Dimensions	63"W x 32-1/4"D x 38-1/2"H
Working Height	35-1/4"
Net Volume	17.3 cu. ft.
Net Weight	254 lb.
Gross Weight	330 lb.



Parts & Labor




Compressor

PLAN VIEW


Front View

60 1/4"

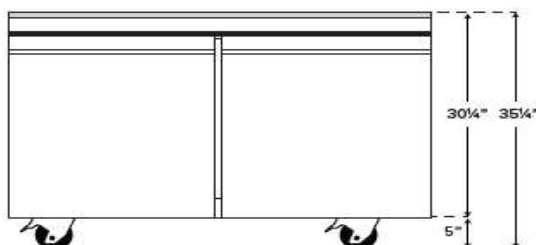

Side View

29 1/2"



Top View

60 1/4"

