



Model #AUC-72

Cooling

Temperature Range	33°F - 40°F
Refrigerant	R290
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/3

Electrical

Voltage	115
Amps	2.7
Hz	60
Phase	1
Plug Type	NEMA-5-15P
Electrical Cord Length	96"

Standard Features – Undercounter Refrigerator Model #AUC-72

- Environmentally-safe R290 refrigerant
- 430 series stainless steel interior and exterior
- Foamed-in-place polyurethane insulation
- (3) epoxy-coated shelf accommodates up to 88 lb.
- Option of Back splashes available. Condensing unit access in back of cabinet, slides out for easy maintenance
- Environmentally-safe R290 refrigerant
- Temperature range of 33°F - 40°F
- Digital temperature controls
- (3) door with recessed handles
- 115V; 1/3 HP
- ETL listed. Conforms to UL STD. 471, Certified to CSA STD. C22. 2No.120
- Conforms to NSF/ANSI STD. 7

Construction

Exterior Material	430 Stainless Steel
Interior Material	430 Stainless Steel
Insulation Material	Foamed-In-Place Polyurethane
Shelf	(2) 20.8" x 17.1" epoxy-coated steel holds up to 88 lb.
Shelf	(1) 23.5" x 17.1" epoxy-coated steel holds up to 88 lb.
Casters	(4) 4" casters for mobility

Dimensions

Exterior Dimensions	71.5"W x 29.5"D x 35.2"H
Interior Dimensions	66.9"W x 19.8"D x 23.5"H
Shipping Dimensions	74"W x 32-1/2"D x 38-1/2"H
Working Height	35-1/4"
Net Volume	20.8 cu. ft.
Net Weight	325 lb.
Gross Weight	370 lb.




Parts & Labor


Compressor

PLAN VIEW

Front View

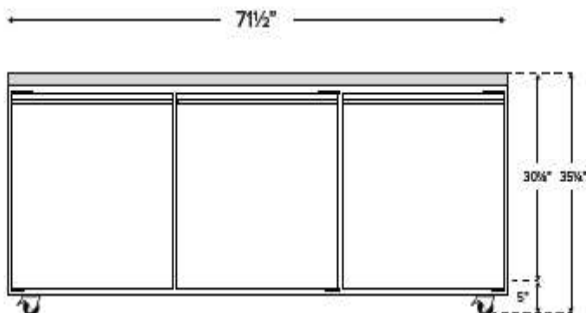

Side View



Top View

